


Designed for performance
 Creating the ultimate flooring experience
 The best solution for every area and every application



Royal

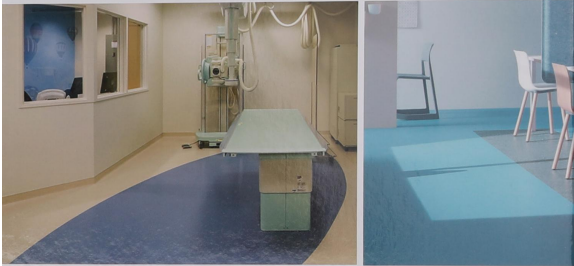

Royal is a durable multi-purpose homogeneous vinyl flooring with non-directional designs. It is an ideal solution for heavy traffic areas such as healthcare, education, retail offices and public buildings. Royal has a surface treated with PUR reinforcement, which means no wax and no polish for life and excellent life cycles costs. The PUR also provides a good base for future maintenance procedures.

INSTALLATION

Royal homogeneous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using the matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA


DESCRIPTION			
Total thickness	EN 428	mm	2.0mm
Wearlayer thickness	EN 429	mm	2.0mm
Weight	EN 430	g/m ²	2950g/m ²
Roll width	EN 426	mm	1830m
Roll length	EN 426	m	20m

CLASSIFICATION			
Classification	EN 685	class	M4-L3
Fire rating	NF P 92-506	—	M2
	EN 13501-1	—	Class B1-s1
	ASTM E649	—	Class 1
	GB 8624-2006	—	GB 8624 B1
Toxic testing	GB 18686-2001	—	Pass
Electrical resistance	EN 1815	ΩV	>2
	EN1081	Ω	>10 ¹¹
Slip resistance dry	EN 13893	—	≥0.3
Slip resistance wet	DIN 51130	—	R9

PERFORMANCE			
Abrasion group	EN 669	—	Group T
Dimensional stability	EN 434	%	±0.40
Residual indentation	EN 433	mm	0.03
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN 605 105-B02	degree	≥6
Chemical resistance	EN 423	—	Good
Cartor wheel test	EN 425	—	Suitable
Impact sound reduction	EN ISO 7172	dB	Approx +4
Flexibility	EN 686	—	Excellent
Anti-bacterial and fungicidal	MRSA	—	Good
Surface treatment	DIN EN ISO 8454/C	—	Good
Underfloor heating		°C	Suitable max 28

CE MARKING EN 14041

Homogeneous Vinyl
 Royal
 Emergency
 Parking
 Entrance

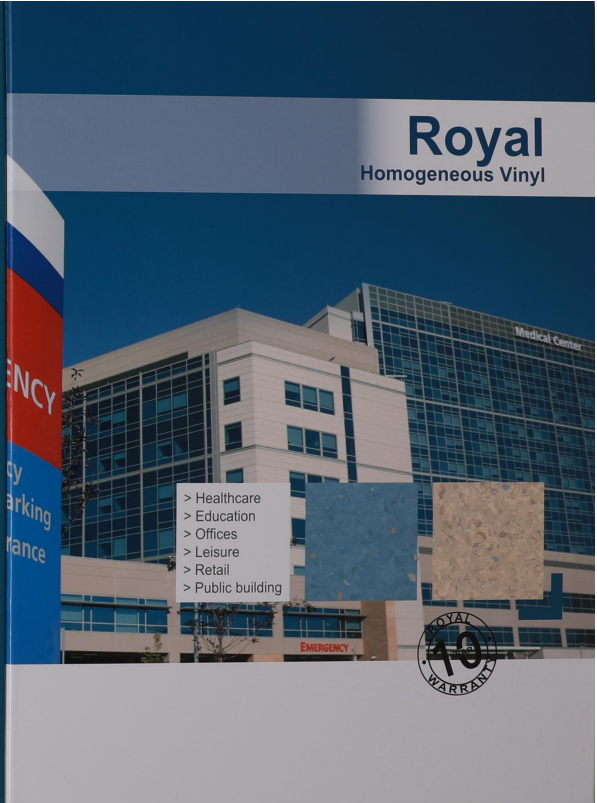

- > Healthcare
- > Education
- > Offices
- > Leisure
- > Retail
- > Public building



Royal

2mm(T) × 1.83m(W) × 20m(L)



4101

4102

4103




4104

4106



4105

4109

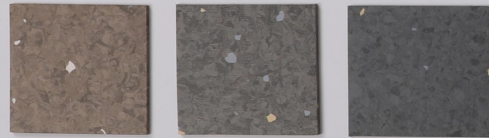

4107

4108

4109

Royal

2mm(T) × 1.83m(W) × 20m(L)



4110


4111



4112

4113

4114

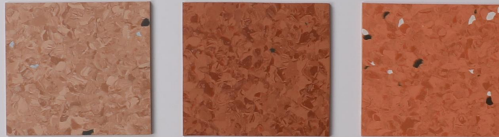

4115

4116

4117




4118

4119

4120

Royal


2mm(T) × 1.83m(W) × 20m(L)

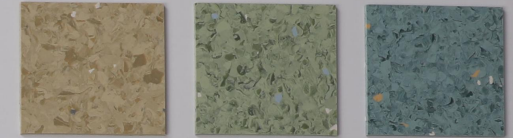

4121

4122


4123

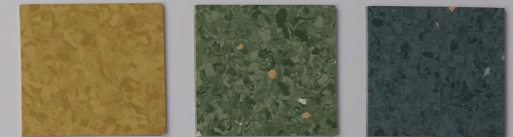

4124

4125


4126

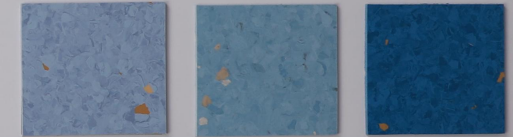

4127

4128

4129

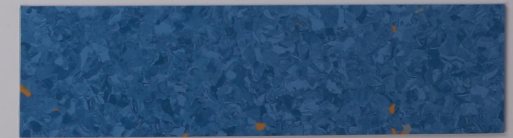

4130