


Designed for performance
 Creating the ultimate flooring experience
 The best solution for every area and every application



Ultra

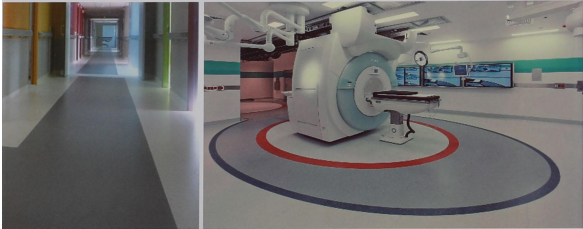

Ultra is a durable, multi-purpose homogeneous vinyl flooring with non-directional designs. It is an ideal solution for heavy traffic areas such as healthcare, education, retail offices and public buildings. Ultra has a surface treated with PUR reinforcement, which means no wax and no polish for life and excellent life cycle costs. The PUR also provides a good base for future maintenance procedures.

INSTALLATION

Ultra homogeneous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 15-24°C. All seams must be heat welded using the matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	2.6mm
Wearlayer thickness	EN 429	mm	2.0mm
Weight	EN 430	g/m ²	2950g/m ²
Roll width	EN 426	cm	200cm
Roll length	EN 426	m	20m

CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	NF P 92-506	—	M2
	EN 13501-1	—	Class B1-s1
	ASTM E648	—	Class 1
	GB 8624-2006	—	GB 8624 B1
Toxic testing	GB 18586-2001	—	Pass
Electrical resistance	EN 1815	kV	< 2
	EN 1081	D	≥ 10 ¹⁰
Slip resistance dry	EN 13893	—	≥ 0.3
Slip resistance wet	DIN 51130	—	R9

PERFORMANCE			
Adhesion group	EN 649	—	Group 1
Dimensional stability	EN 434	%	≤ 0.40
Flexural indentation	EN 433	mm	≤ 0.3
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN ISO 105 - B02	degree	≥ 6
Chemical resistance	EN 423	—	Good
Caster wheel test	EN 425	—	Suitable
Impact sound reduction	EN ISO 7172	dB	Approx +4
Flexibility	EN 645	—	Excellent
Anti-bacterial and fungicidal	MRSA	—	Good
Surface treatment	DIN EN ISO 846-A1C	—	FR
Underfloor heating	—	°C	Suitable max. 28

CE MARKING	
EN 14041	

Homogeneous Vinyl


Ultra

Topflor

Ultra Homogeneous Vinyl



- > Healthcare
- > Education
- > Offices
- > Leisure
- > Retail
- > Public building



The ultimate flooring
 The ultimate performance

● Ultra

2mm(T) × 2.0m(W) × 20m(L)




2053



2055




2058




2054




2052



2076



2051



2056




2050



2080



2074



2071

● Ultra

2mm(T) × 2.0m(W) × 20m(L)



2062



2084




2061



2077



2057



2060



2059



2078




2073



2079

● Ultra


2mm(T) × 2.0m(W) × 20m(L)




2070




2069



2081



2082




2068




2063




2065




2067



2066



2064



2075



2083

